
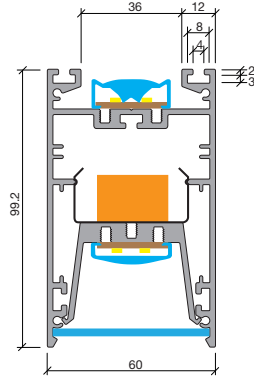


LUMATECH

Linear Lighting Solutions


LT60H Suspended Direct-Indirect

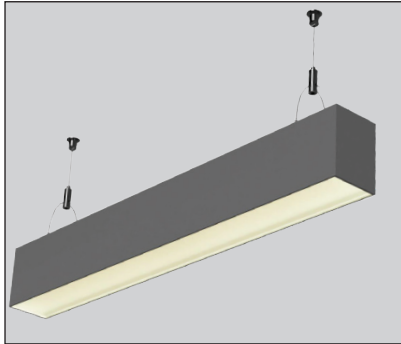

FEATURES


- Designed with the installer in mind for a fast & cost effective install.
 - A substantial gear tray provides excellent thermal management ensuring long component life and high lumen maintenance.
 - Choice of screwed or screwless endcaps.
 - High efficacy up to 125Lm/W.
 - Plug & play joining of long runs over 5m.
 - Tridonic LED boards & drivers (3K & 4K as standard) with 2.7K, 5K, 6.5K, Tuneable White 27-65K options & Sunlike full spectrum.
 - Colour consistency 3 MacAdams.
 - L90 @ 50,000hrs B10 & CRI 90 as standard.
 - Certified IES files.
 - Designed & manufactured locally.
 - Where possible components are sourced locally.
 - The 6060 grade aluminium used in the production of these profiles is smelted and extruded in New Zealand.
- The CO2 emitted per Kg of aluminium produced is one of the lowest in the world.
- The indirect component uses a Tridonic batwing or asymmetric distribution linear lens for upward illumination.
 - Direct/indirect commonly switched has a 67/33 lumen split as standard a with 50/50 lumen split for individually switched.

DIFFUSERS

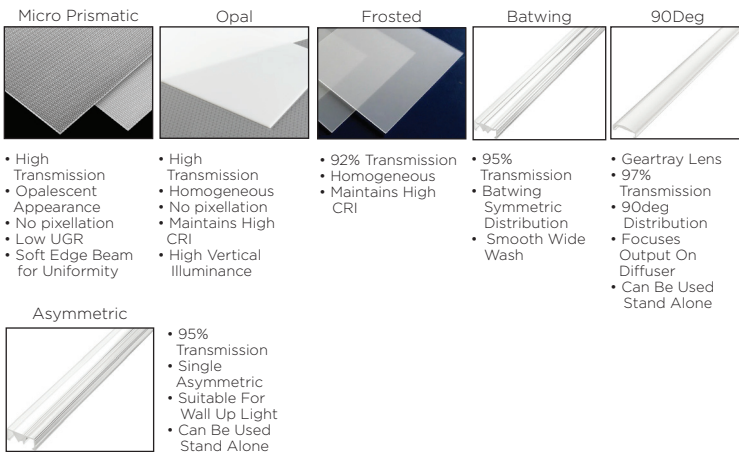


Cast sheet is chosen for diffusers due its greater dimensional stability. Linear lens are PMMA from Tridonic and provide touch protection for non SELV applications.

DISTRIBUTION

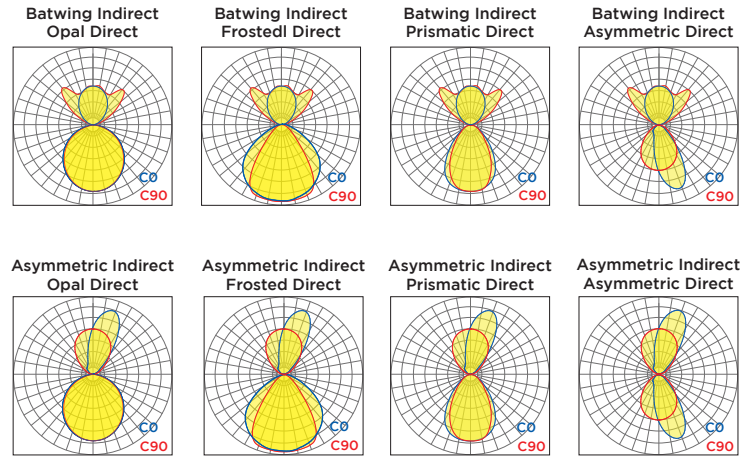

CONTROL - DIM - EMERGENCY

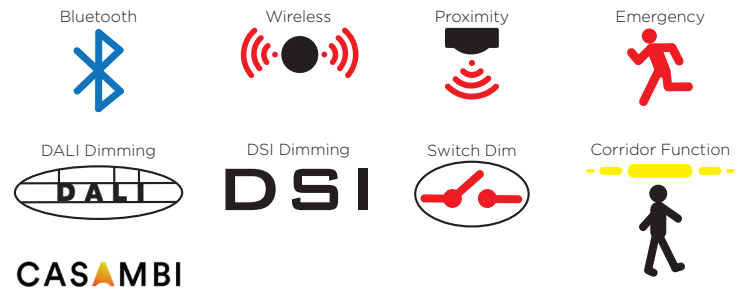

COLOURS

- Powder Coat Colours
- Dulux Protecture White (20T1274F)
 - Dulux Protecture Black (20T9215F)
 - Dulux Protecture Silver Pearl (Light Grey) (21T7852F)
 - Custom colours to order

5
YEAR

Lumatech Limited, 35 Timothy Place, Avondale, Auckland, New Zealand.

Ph: 09-2813732 Email: sales@lumatech.co.nz www.lumatech.co.nz

LUMATECH

Linear Lighting Solutions

LUMEN/M


CRI90 p/m 4000K		150mA		200mA		250mA		300mA		350mA		400mA		Rows Direct Boards	Rows Indirect Boards	
		Lm	W	Lm	W	Lm	W	Lm	W	Lm	W	Lm	W			
LT60H Medium Output	Opal	Direct	12.5	16.7	20.9	25.0	29.2	33.4	1x Rows Medium Output	1x Rows Low Output	1278	1703	2129	2555	2981	3407
	Micro Prismatic										1308	1744	2180	2616	3052	3488
	Frosted										1453	1937	2421	2906	3390	3874
	Asymmetric Frosted										1503	2004	2505	3006	3507	4008
	Batwing	Indirect	6.3	8.3	10.4	12.5	14.6	16.7			797	1063	1329	1595	1861	2126
	Asymmetric										902	1202	1503	1804	2104	2405
Lumen output for other boards multiply lumens by		CRI90 3000K 0.96				CRI80 4000K 1.18				CRI80 3000K 1.13						
IES Files are standard for 1m. Specific length IES files are available on request. Example 4.7m.																

JOINS & CORNERS

Profile corners and joins are welded providing a seamless transitions and no light leakage.

Custom angled joins on request.

Joins can be horizontal or vertical

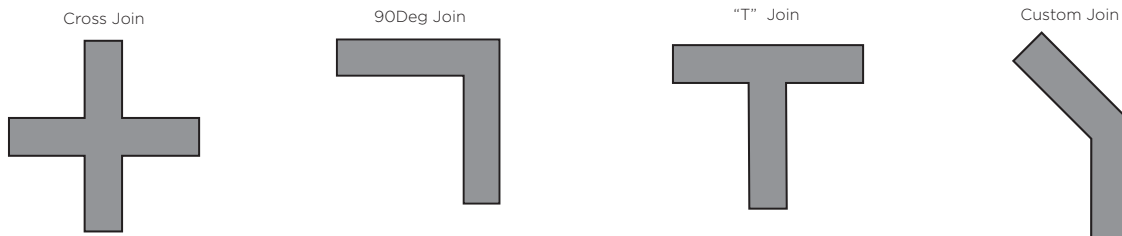

LENGTH CALCULATION

Luminaires are constructed by using combinations of geartray sizes starting at 565mm and up to 1685mm moving up in 70mm increments.

This will give a fully illuminated diffuser from end to end and joins in the profile will be positioned by Lumatech to keep uniform lengths.

High output and certain other specialist boards are only available in 280mm increments, please check with us if length is crucial.

If a specific length is required in between LED board increments available, these are achieved using blanking plates.

Endcap assemblies require a total of 15mm allowance, for recessed luminaires this becomes the cut-out dimension

ACCESSORIES & OPTIONS

- Italian 3m suspensions with tool-less height adjustment.
- Screwed endcaps for budget applications.
- Screwless endcaps for a seamless look.
- Round or square ceiling roses.
- Rod suspensions.

Lumatech Limited, 35 Timothy Place, Avondale,
Auckland, New Zealand.

Ph: 09-2813732 Email: sales@lumatech.co.nz www.lumatech.co.nz