







LUMATECH

Linear Lighting Solutions

LT100D Suspended-Direct

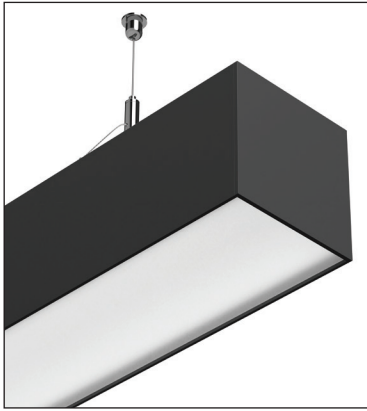


DISTRIBUTION




FEATURES

- Designed with the installer in mind for a fast & cost effective install.
- A substantial gear tray provides excellent thermal management ensuring long component life and high lumen maintenance.
- Choice of screwed or screwless endcaps.
- High efficacy up to 125Lm/W.
- Plug & play joining of long runs over 5m.
- Tridonic LED boards & drivers (3K & 4K as standard) with 2.7K, 5K, 6.5K, Tuneable White 27-65K options & Sunlike full spectrum.
- Colour consistency 3 MacAdams.
- L90 @ 50,000hrs B10 & CRI 90 as standard.
- Certified IES files.
- Designed & manufactured locally.
- Where possible components are sourced locally.
- The 6060 grade aluminium used in the production of these profiles is smelted and extruded in New Zealand.
- The CO2 emitted per Kg of aluminium produced is one of the lowest in the world.

DIFFUSERS

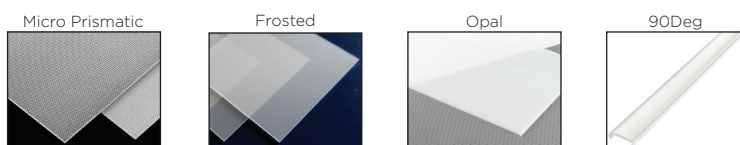

- Micro Prismatic**
 - High Transmission
 - Opalescent Appearance
 - No pixellation
 - Low UGR
 - Soft Edge Beam for Uniformity
- Frosted**
 - 92% Transmission
 - Homogeneous
 - Maintains High CRI
- Opal**
 - High Transmission
 - Homogeneous
 - No pixellation
 - Maintains High CRI
 - High Vertical Illuminance
- 90Deg**
 - Geartray Lens
 - 97% Transmission
 - 90deg Distribution
 - Focuses Output On Diffuser
 - Can Be Used Stand Alone

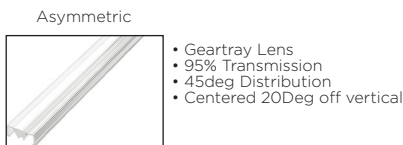

Cast sheet is chosen for diffusers due its greater dimensional stability. Linear lens are PMMA from Tridonic and provide touch protection for non SELV applications.

CONTROL - DIM - EMERGENCY

Bluetooth Wireless Proximity Emergency

DALI Dimming DSI Dimming Switch Dim Corridor Function

CASAMBI

COLOURS

- Powder Coat Colours
- Dulux Protecture White (20T1274F)
 - Dulux Protecture Black (20T9215F)
 - Dulux Protecture Silver Pearl (Light Grey) (21T7852F)
 - Custom colours to order



LUMATECH


Linear Lighting Solutions

LUMEN/M

CRI90 p/m 4000K		150mA		200mA		250mA		300mA		350mA		400mA		Rows Direct Boards		
		Lm	W	Lm	W	Lm	W	Lm	W	Lm	W	Lm	W			
LT100D Low Output	Opal	Direct	1218	12.5	1624	16.7	2030	20.9	2436	25.0	2842	29.2	3247	33.4	2 x Low Output	
	Micro Prismatic		1350		1800		2250		2700		3150		3600			
	Frosted		1498		1997		2497		2996		3496		3995			
	Asymmetric		765		6.3		1020		8.3		1275		10.4		1530	12.5
LT100D Medium Output	Opal	Direct	2436	24.1	3247	32.1	4059	40.1	4871	48.2	5683	56.2	6495	64.2	2 x Medium Output	
	Micro Prismatic		2700		3600		4500		5400		6300		7200			
	Frosted		2996		3995		4994		5992		6991		7990			
	Asymmetric		1530		12.5		2041		16.7		2551		20.9		3061	25.0
LT100D High Output	Opal	Direct	3702	36.1	4936	48.2	6170	60.2	7404	72.3	8638	84.3	N/A		2 x High Output	
	Micro Prismatic		4104		5472		6840		8208		9576					10626
	Frosted		4554		6072		7590		9108		10626					
	Asymmetric		2326		18.8		3102		25.0		3877				31.3	4653
Lumen output for other boards multiply lumens by		CRI90 3000K 0.96				CRI80 4000K 1.18				CRI80 3000K 1.13						
IES Files are standard for 1m. Specific length IES files are available on request. Example 4.7m.																

JOINS & CORNERS

Profile corners and joins are welded providing a seamless transitions and no light leakage.
 Custom angled joins on request.
 Joins can be horizontal or vertical

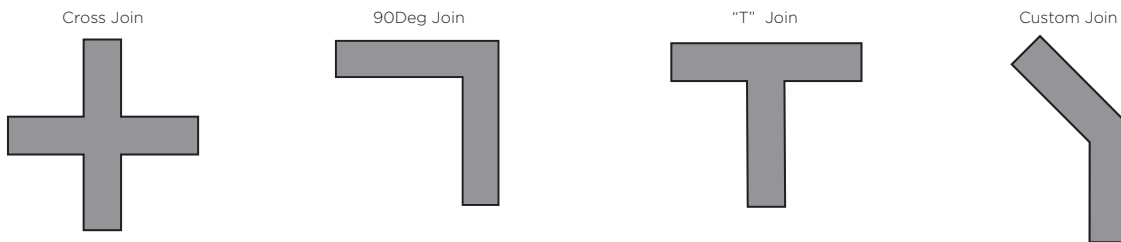

LENGTH CALCULATION

Luminaires are constructed by using combinations of geartray sizes starting at 565mm and up to 1685mm moving up in 70mm increments. This will give a fully illuminated diffuser from end to end and joins in the profile will be positioned by Lumatech to keep uniform lengths. High output and certain other specialist boards are only available in 280mm increments, please check with us if length is crucial. If a specific length is required in between LED board increments available, these are achieved using blanking plates. Endcap assemblies require a total of 15mm allowance, for recessed luminaires this becomes the cut-out dimension.

ACCESSORIES & OPTIONS

- Italian 3m & 5m suspensions with tool-less height adjustment.
- Screwed endcaps for budget applications.
- Screwless endcaps for a seamless look.
- Round or square ceiling roses.
- Rod suspensions.