

LUMATECH

Linear Lighting Solutions

Rod Suspension

FEATURES

- Designed with the installer in mind for a fast & cost effective install.
- Heavy gauge materials ensuring durability & strength.
- Designed, engineered & manufactured locally.
- 8mm stainless steel rod with M8 nylock nuts top & bottom for vibration resistance.
- Suitable for all Lumatech suspended profiles.
- Standard 1m lengths and up to 3m upon request.
- Adjustment at ceiling level up to 20mm for leveling.
- Up to +/-5deg of adjustment in brackets.
- Powder coated sleeve to conceal rod.

DIMENSIONS

- Dimensions installed on ceiling 75mm dia x 45mm deep.
- Rod cover (tube) 12.7mm dia.



FINISH

Powder Coat Colours

- Dulux Mannex White
- Dulux Mannex Black
- Dulux Mannex Silver Pearl (Light Gray)
- Custom colours to order

INSTALLATION

- Must be installed to the relevant part the lighting standard AS/NZS 60598 plus seismic restraint NZS 4219.

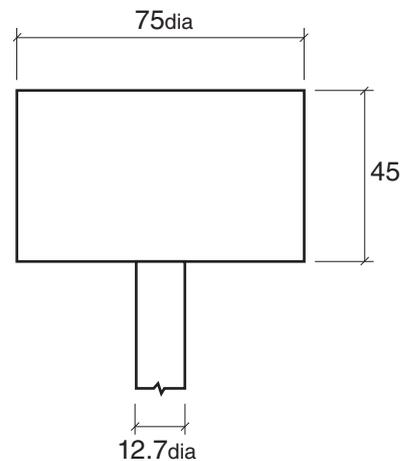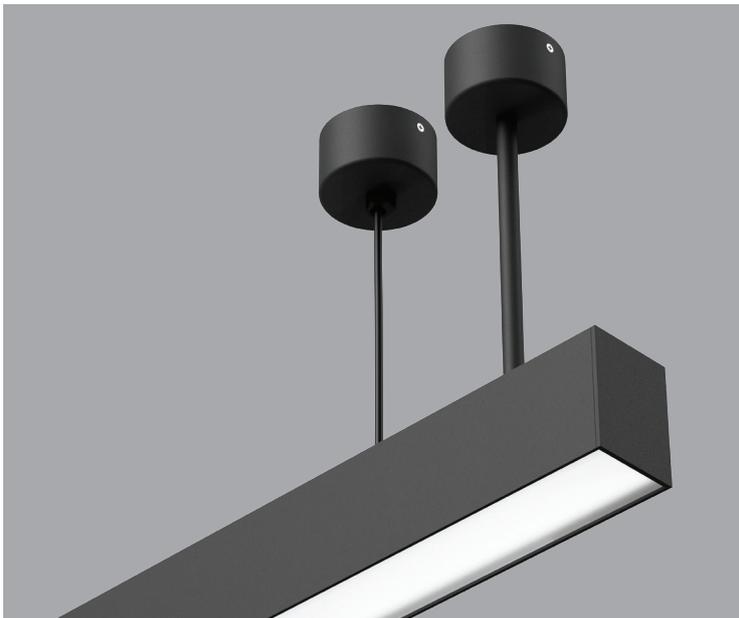

5
YEAR